




Combics Pro Terminal CISPRO



All dimensions in mm.

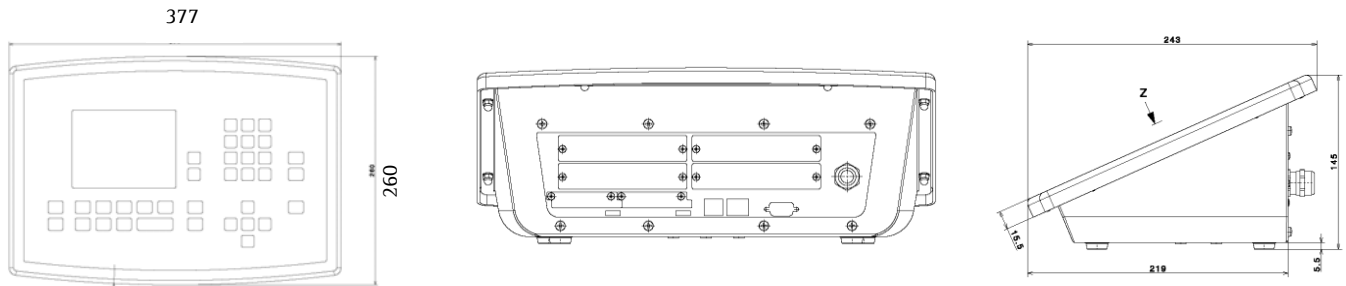

- : High-contrast, backlit color graphics display, with 20mm display for weight readouts with status indicators, bargraph
- : Alphanumeric keypad with "ABC" input
- : 5 Softkeys
- : Large keys with positive click action and acoustic confirmation
- : Data Interface RS232, Ethernet and PS/2 as standard
- : Optional: 6 additional interfaces: 2x A/D-Transmitter, RS232, RS485, RS422, analogue In-/Outputs, digital In-/Outputs, Profibus, Interbus, Ethernet, DeviceNet
- : up to 62 Platforms/Scales connectable via xBPI-Protocol
- : with optional application programs
- : programmable

Specifications:

Display	: High-contrast, backlit color graphics display with 320x240 pixel resolution, weighing results 20mm plus status indicators, bargraph
Data interfaces	Bi-directional RS-232, Ethernet and PS/2 built-in as a standard feature
Digital, protected interface	According to EN45501
Additional interface	Optional (2x A/D-Transmitter, RS232, RS485, RS422, analogue In-/Outputs, digital In-/Outputs, Profibus, Interbus, Ethernet, DeviceNet)
Housing	
Material	AISI 304
Type of protection acc. to 60529	Front Plate: IP67; Rear panel: IP30, optional IP67
Dimensions (Width x Depth x Height)	377x260x145 mm
Temperature range	-10°C to +40°C
Power supply	100-240 VAC (-15/+10%), 48-62 Hz, 14,5W/19VA
Power cord length	3 m
Net weight (approx.)	3,8 kg
Limitation of emissions	According to EN61326+A1 Class B (IEC 61326+A1)
Defined immunity to interference	According to EN61326+A1, industrial environments (IEC 61326+A1)
Electrical safety	According to EN61010-1 (IEC 101-1), EN60950 (IEC 950)