




Kontrols & Industrial Weighing

IU Pallet scales



sartorius
mechatronics

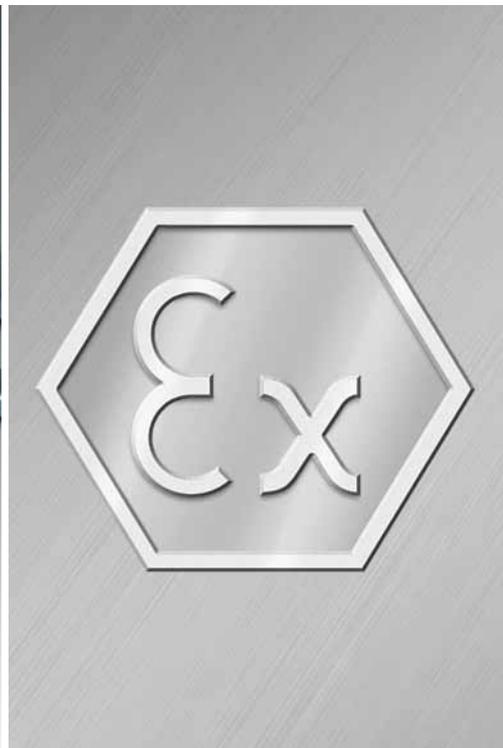

turning science into solutions

48 basic models with customized options

The product

IU pallet scales represent a new generation of industrial weighing equipment. From 10 g to 3,000 kg, from basic weighing to convenient, application-oriented weighing systems, from processing to the chemical industry, the IU line of pallet scales can do it all thanks to the wide range of resolutions and verifiable accuracies available. These weighing platforms are ATEX-compliant for use in various hazardous area Zone classifications. And, as if the diversity of the basic models wasn't enough, the additional custom features we can provide on request make this range truly unique.

A broad range of special equipment and features are available as options and accessories for any of the 48 basic models. The pallet scale is not only preconfigured, it is also verified at the factory for use in legal metrology at the place of installation. We can even fulfill special requests, such as the use of higher-grade materials for the platform, and much more!

Main features

Strain-gauge technology: 4 load cells ensure precise results

Profile: standard platform height is 76 mm

Material | surface finish: ST37 galvanized steel or bead-blasted AISI 304 stainless steel

Resolution: scale intervals of 15,000 d, 30,000 d, 1×3000 e (single range) or 2×3000 e (multiple range) are available for all models

IP protection: The galvanized steel platforms meet IP65 requirements; stainless steel versions are rated to IP68

An IP69K version is available on request

All platforms have 2 rollers and a handle for effortless mobility

On request, stainless steel models can be delivered with an electropolished finish, or the entire platform can be made from AISI 316 Ti stainless steel

Additional columns can be supplied on request

Inlay plates can be supplied for weighing loads of up to 600 kg

Special versions can be manufactured for use in IBC handling and Big Bag filling

For use in hazardous areas in accordance with ATEX


The stainless steel IUXS4... models are certified for use in ATEX Category 2, Zone 1 (gases) and Zone 21 (dusts) hazardous areas in accordance with KEMA – EC type-approval certificate II 2G 1D EEx ib IIC T4 T155°C IP68, and come with Verification of Intrinsic Safety that applies to other explosion-protected Sartorius components as well, such as intrinsically safe Combics indicators or Factory terminals, intrinsically safe load cell interfaces, and various transmitters.

If you order Option Y2 with an IUS4 (stainless steel) or IUG4 model (galvanized steel), the platform is rated for use in ATEX Category 3, Zone 2 (gases) and Zone 22 (dusts) hazardous areas in accordance with EN50021 with manufacturer's declaration of conformity:

II 3GD EEx nA II T6 T80°C IP65/IP67, and come with Verification of Intrinsic Safety that applies to other explosion-protected Sartorius Ex components as well, such as Combics plus Option Y2, or transmitters.

Specifications

General View

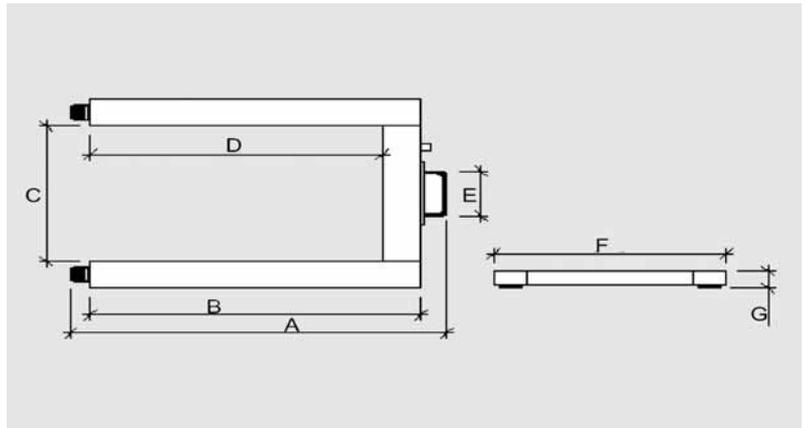

| Code | A | B | C | D | E | F | G |
|-------------------|----------|----------|--------|----------|--------|--------|-------|
| Dimensions | 1,370 mm | 1,190 mm | 600 mm | 1,080 mm | 200 mm | 840 mm | 76 mm |

Resolutions

Resolution 1

Weighing capacity –L, –I, –LCE

| Capacity in kg | 15,000 d in g | 30,000 d in g | 1×3000 e in g |
|----------------|---------------|---------------|---------------|
| 300 | 20 | 10 | 100 |
| 600 | 50 | 20 | 200 |
| 1,500 | 100 | 50 | 500 |
| 3,000 | 200 | 100 | 1,000 |

Resolution 2

Weighing capacity –NCE 2×3000 e

| Capacity in kg | Capacity 1 in kg | Resolution Range 1 in g | Capacity 2 in kg | Resolution Range 2 in g |
|----------------|------------------|-------------------------|------------------|-------------------------|
| 300 | 150 | 50 | 300 | 100 |
| 600 | 300 | 100 | 600 | 200 |
| 1,500 | 600 | 200 | 1,500 | 500 |
| 3,000 | 1,500 | 500 | 3,000 | 1,000 |

Features

Version: galvanized steel in IP65, or AISI 304 (optional: AISI 316 Ti electropolished) stainless steel in IP76/68

An IP69K version is available on request

4× C 3 load cells

Overload protection

4× adjustable feet and level indicator


Allowable ambient operating temperature:
-10°C to +40°C (+14°F to +104°F)

Resolutions: verifiable (legal for trade),
Class III : (1×3000 e, 2×3000 e) or standard
(not legal for trade): 15,000 d, 30,000 d

The length of the cable for connecting an indicator is 6 m



Example for placing an order: platform model IUS4-1500NI-LCE
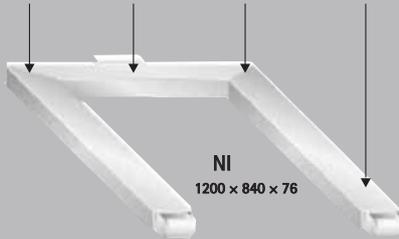
| IU | S | 4 | - | 1500 | NI | - | LCE |
|---|--|---|---|--|------------------|---|---|
| Plat- form | Finish: G = Galvanized steel S = Stainless steel XS = Ex-protected stainless steel | No. of load cells  | | Weighing capacity in kg  | Platform size | | Resolution: Standard (not legal for trade): 15,000 d = L 30,000 d = I Verifiable (legal for trade): 3,000 e = LCE 2 × 3,000 e = NCE* |
| * Weighing capacity 150 kg not available for platform sizes NN, RN, RR or WR | | | |  | | | |

Kontrols & Industrial Weighing
Unit 6A, 11 Bryants Rd
Dandenong, 3175 VIC
AUSTRALIA

Tel. +61 3 9791 5569
Fax. +61 3 9791 5589
e-mail: sales@kiw.com.au
www.kiw.com.au

Specifications subject to change without notice.
Printed in Germany on paper that has been
bleached without any use of chlorine.
W/sart-206 · G
Publication No.: W--0107-e07115
Order No.: 98649-000-82