



RAPID DUAL

Metal separator for free-fall applications

- Detects and separates magnetic and non-magnetic metal contamination, even when enclosed in product
- Reduces expensive machinery failure and minimises production downtime
- Ensures product quality
- Prevents customer complaints
- Break even within a very short period of time



- Minimum space requirement and can be easily fitted into existing pipeline systems
- Standard Jacobs adaptors for inlet and outlet ensure quick, hassle-free installation
- Separation unit and enclosure in stainless steel
- Minimal loss of good material through "Quick Flap" reject system
- Vertical, barrier free material throughput; reject angle 40°
- Preinstalled settings allow easy operation
- Teach-in mode or manual product compensation (not pre installed) for better adaption to product conductivity
- drop height 700 mm



Kontrols & Industrial Weighing

Unit 6A, 11 Bryants Rd
Dandenong, 3175 VIC
Australia
Tel. 03 9791 5569
Fax. 03 9791 5589
E. sales@kiw.com.au
www.kiw.com.au

For detailed information please request our technical datasheet or contact our experienced KIW sales consultants.

RD-P-PR-EN-0709-V1.0




Metal separator RAPID DUAL used for machinery protection during wood pellet production

Product Description:

The metal separator RAPID DUAL is used to inspect slowly moving bulk material such as foil flakes, wooden pellets, etc. as well as large streams in free-fall pipelines.

It detects all magnetic and non-magnetic metal contamination (steel, stainless steel, aluminium) – even when enclosed in the product. Metal contaminations are rejected through the “Quick Flap” reject unit with dual separation flap.

Function Chart:

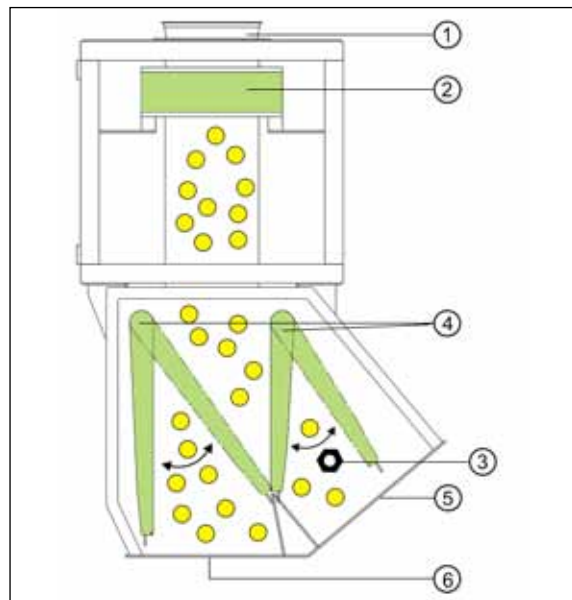

1) Infeed 2) Detection coil 3) Metal contaminant
4) Dual separation flap 5) Rejected material
6) “Good” material

Scope of delivery:

- Compact system with integrated detection system and separation unit
- Control unit PRIMUS

Options/Accessories:

- Audible and visual alarm systems
- Feed hopper and filler inlet
- Magnet system to remove Fe contaminants
- Filter and regulator valve
- Air pressure monitor
- UL/CSA certification
- Removable control unit
- Control unit SENSITY for higher sensitivity

Typical Application Areas:

- Plastics industry, In-house recycling
- Recycling industry
- Wood industry
- Chemical industry
- Feedingstuff industry

Application:

- Machinery protection for extruders, fine grinding mills, hackers, pellet presses, after dosing (rotary valve, vibratory feed chutes)
- Quality control e.g. for pre-delivery inspection of incoming goods, granulate, reclaim stations or bagging stations